

LISTEN.
THINK.
SOLVE.SM

BULLETIN 100-K Miniature Modular Control System



ALLEN-BRADLEY • ROCKWELL SOFTWARE

**Rockwell
Automation**





IEC Miniature Contactors

- Bulletin 100/104-K Miniature Contactors

Page 4



IEC Miniature Control Relays

- Bulletin 700-K Miniature Control Relays

Page 8



IEC Miniature Thermal Overload Relays

- Bulletin 193-K Miniature Thermal Overload Relays

Page 11



IEC Circuit Breakers

- Bulletin 140M Circuit Breakers
- Bulletin 140F Fuse Holder

Page 12

Page 13



IEC Miniature Starter Selection

- Selection

Page 17



Bulletin 100-K / 104-K IEC Contactors

- Compact size
- Same dimensions for AC and DC
- Full-voltage non-reversing and reversing contactors
- 5, 9, and 12 A Contactors rated at 690V
- IP2X Finger Protection
- Optional integrated surge suppressor
- Compatible with Bulletin 193-K bimetallic overload relay
- Mirror contacts per IEC 60947-4-1 and mechanically linked contacts per IEC 60947-5-1 on main unit

Table of Contents

Product Selection this page
 Accessories..... 10
 Specifications..... 22
 Approximate
 Dimensions..... 31

Standards Compliance

IEC/EN 60947-1,-4-1,-5-1,-5-4
 UL 508
 CSA 22.2. No. 14
 NF F 62-000

Approvals

CE marked
 cULus listed (File No. E41850,
 Guide No. NLDX and NLDX7)

Allen-Bradley Bulletin 100-K miniature contactors are designed for commercial and light industrial applications where panel space is at a premium. These miniature devices, while 45 mm wide, are shallower and have less panel depth requirements than standard IEC contactors.

The miniature contactors have been designed with flexibility in mind. They are available with AC or DC operating coils, several contact ratings, and optional 2- or 4-pole adder decks in a variety of auxiliary contact configurations.

Your order must include: cat. no. (with coil voltage code) of the mini contactor specified and, if required, cat. no. of any accessories

Miniature Contactors



Non-Reversing Mini-Contactors — 3 N.O. Power Poles with Auxiliary Contact

Rated Operational Current I_e [A]	Ratings for switching AC motors - AC-2, AC-3, AC-4										Auxiliary Contacts		Pkg. Qty.	Cat. No.
	3Ø kW (50 Hz)				Hp (60 Hz)						N.O.	N.C.		
	40 °C	230V	400/415V	500V	690V	1Ø		3Ø						
115V						230V	200V	230V	460V	575V				
AC-1	230V	400/415V	500V	690V	115V	230V	200V	230V	460V	575V	N.O.	N.C.	Pkg. Qty.	Cat. No.
20	1.5	2.2	2.2	2.2	1/2	1	1-1/2	1-1/2	3	3	1	0	1	100-K05⊗10
											0	1	1	100-K05⊗01
20	3	4	4	4	1/2	1-1/2	2	2	5	5	1	0	1	100-K09⊗10
											0	1	1	100-K09⊗01
20	3	5.5	5.5	5.5	3/4	2	3	3	7-1/2	7-1/2	1	0	1	100-K12⊗10
											0	1	1	100-K12⊗01

May be ordered in package quantities of 20. Add letter M to the end of the cat. no. Example: **100-K09ZJ10M**.

⊗ The Cat. No. as listed is incomplete. Select a Coil Voltage Code from the table on page 9 to complete the Cat. No.
 Example: 24V DC: Cat. No. **100-K05⊗10** becomes Cat. No. **100-K05ZJ10**.



Non-Reversing Mini-Contactors — 4 Power Poles

Rated Operational Current I_e [A]	Ratings for switching AC motors - AC-2, AC-3										Contact Configuration, Main Pole		Pkg. Qty.	Cat. No.
	3Ø kW (50 Hz)				Hp (60 Hz)									
					1Ø		3Ø							
40 °C	230V	400/415V	500V	690V	115V	230V	200V	230V	460V	575V	N.O.	N.C.		
AC-1														
20	1.5	2.2	2.2	2.2	1/2	1	1-1/2	1-1/2	3	3	4	0	1	100-K05Ø400
											3	1	1	100-K05Ø300
											2	2	1	100-K05Ø200
20	3	4	4	4	1/2	1-1/2	2	2	5	5	4	0	1	100-K09Ø400
											3	1	1	100-K09Ø300
											2	2	1	100-K09Ø200
20	3	5.5	5.5	5.5	3/4	2	3	3	7-1/2	7-1/2	4	0	1	100-K12Ø400
											3	1	1	100-K12Ø300
											2	2	1	100-K12Ø200

May be ordered in package quantities of 20. Add letter M to the end of the cat. no. Example: **100-K09ZJ400M**.

⊗ The Cat. No. as listed is incomplete. Select a Coil Voltage Code from the table below to complete the Cat. No.
 Example: 24V DC: Cat. No. **100-K05Ø400** becomes Cat. No. **100-K05ZJ400**.

Reversing Mini-Contactors — 3 N.O. Power Poles with Auxiliary Contact

Rated Operational Current I_e [A]	Ratings for switching AC motors - AC-2, AC-3, AC-4										Auxiliary Contacts per Contactor		Cat. No.
	3Ø kW (50 Hz)				Hp (60 Hz)								
					1Ø		3Ø						
40 °C	230V	400/415V	500V	690V	115V	230V	200V	230V	460V	575V	N.O.	N.C.	
AC-1													
20	1.5	2.2	2.2	2.2	—	—	1-1/2	1-1/2	3	3	0	1	104-K05Ø02
20	3	4	4	4	—	—	2	2	5	5	0	1	104-K09Ø02
20	3	5.5	5.5	5.5	—	—	3	3	7-1/2	7-1/2	0	1	104-K12Ø02

Used for electrical interlocking

⊗ The Cat. No. as listed is incomplete. Select a standard Coil Voltage Code from the table below to complete the Cat. No.
 Example: 230V, 50/60 Hz: Cat. No. **104-K05Ø02** becomes Cat. No. **104-K05KF02**.

Bulletin 104-K reversing contactors are factory assembled and include contactors, mechanical interlock (Cat. No. 100-KMCH) and wiring kit (Cat. No. 100-KPR) for power and control circuit (electrical interlock).

⊗ Coil Voltage Code























The Cat. No. as listed is incomplete. Select a coil voltage code from the table below to complete the Cat. No. Example: 120V, 60 Hz:
Cat. No. 100-K09 10 becomes **Cat. No. 100-K09D10**.

AC Voltages [V]	24	110	120	230	240	400	480	600
50 Hz	—	D	—	—	—	—	—	—
60 Hz	—	—	D	—	—	—	B	VC
50/60 Hz	KJ	—	—	KF	KA	KN	—	—







DC Voltages [V]	12	24	110	125	220	250
Standard	ZQ	ZJ	ZD	ZS	ZA	ZT
with Integrated Diode	—	DJ	—	—	—	—

For other voltages, see table on page 31

Auxiliary Contact Blocks





	Description	Connection Diagrams	 		For Use With	Pkg. Qty.	Cat. No.
			N.O.	N.C.			
			0	2	100-K05...K12 10	1	100-KFC02
			1	1	100-K05...K12 10	1	100-KFC11
			2	0	100-K05...K12 10	1	100-KFC20
	Front-mounted auxiliary contacts Auxiliary Contact Blocks 2- and 4-pole versions Choice of contact configurations Snap on, no tools required Electronic-compatible bifurcated contacts for signals down to 15V/2 mA Mirror Contact performance per IEC 60947-4-1		0	4	100-K05...K12 10	1	100-KFC04
			1	3	100-K05...K12 10	1	100-KFC13
			3	1	100-K05...K12 10	1	100-KFC31
			2	2	100-K05...K12 10	1	100-KFC22
			4	0	100-K05...K12 10	1	100-KFC40
			0	2	100/104-K, 700-K	1	100-KFA02E
			1	1	100/104-K, 700-K	1	100-KFA11E
			2	0	100/104-K, 700-K	1	100-KFA20E
			0	4	100/104-K, 700-K	1	100-KFA04E
			1	3	100/104-K, 700-K	1	100-KFA13E
			2	2	100/104-K, 700-K	1	100-KFA22Z
			3	1	100/104-K, 700-K	1	100-KFA31Z
			4	0	100/104-K, 700-K	1	100-KFA40E
			4	0	100/104-K, 700-K	1	100-KFA40E

Control Modules

	Description	Connection Diagrams	For Use With	Pkg. Qty.	Cat. No.
	Mechanical Interlock For interlocking of two adjacent contactors No added width to contactor assembly Front mount Plug-In type Optional auxiliary contact blocks and suppressor modules mount onto the interlock		100-K, 700-K (AC & DC Control)	1	100-KMCH
	Surge Suppressor Plug-in Type Limits surge voltage on coil drop-off		100/104-K, 700-K	1	100-KFSC50
				1	100-KFSC280
				1	100-KFSC480
			100/104-K, 700-K	1	100-KFSV55
				1	100-KFSV136
				1	100-KFSV277
			100/104-K, 700-K	1	100-KFSD250

May be ordered in package quantities of 10. Add letter M to the end of the cat. no. Example: 100-KFSC50M.



Connecting Components

	Description	For Use With	Pkg. Qty.	Cat. No.	
	ECO Connecting Module For DOL and reversing starters Provides electrical and mechanical link	Connects: 140M-C circuit breakers with 100-K contactors	140M-C to 100-K	1	140M-C-PEK12
	Power Wiring Kit	For Reversing and Star/Delta combinations. Star-point bridge not included.	100-K	1	100-KPR
	Feeder Terminal for Compact Bus Bars	Supply of compact bus bars	100-K	1	100-KWT
	Three-Phase Compact Bus Bars	For 100-K, 5...12 A contactors 45 mm spacing (3 connections)*	100-K	1	100-KW453
		For 100-K, 5...12 A contactors 45 mm spacing (4 connections)*	100-K	1	100-KW454

May be ordered in package quantities of 10. Add letter M to the end of the cat. no. Example: **140M-C-PEK12M**.

* Combinations possible. Example: For 6 contactor connections use one cat. no. 100-KW453 and one cat. no. 100-KW454.

Marking Systems

	Description	Pkg. Qty.	Cat. No.
	Label Sheet 10 sheets with 105 self-adhesive paper labels each, 6 x 17 mm	10	100-FMS
	Snap-In Hinged Marker Card	5	1492-MH6X12



Bulletin 700-K Miniature Control Relays

- IEC compact industrial relay
- IP2X Finger Protection
- Bifurcated contacts for low-level signals
- Optional integrated coil protection diode

Table of Contents

Product Selection this page
 Accessories..... 13
 Specifications..... 27
 Approximate
 Dimensions 31

Standards Compliance

IEC/EN 60947-1,-5-1,-5-4
 UL 508
 CSA 22.2. No. 14
 NF F 62-000

Approvals

CE marked
 cULus listed (File No. E33916,
 Guide No. NKCR and NKCR7)

4-Pole AC or DC Coil Voltage

AC-12		AC-15 (B600)							Connection Diagrams	Contacts		Pkg. Qty.	Cat. No.
I_e [A]		I_e [A]								N.O.	N.C.		
40 °C	60 °C	24/48V	120V	240V	400V	500V	600V	690V					
10	6	3	3	2	1.2	1	0.6	0.6		4	0	1	700-K40E-⊗
										3	1	1	700-K31Z-⊗
										2	2	1	700-K22Z-⊗
										1+1L*	1+1L*	1	700-KL22Z-⊗

May be ordered in package quantities of 20. Add letter M to the end of the cat. no. Example: **700-K40E-ZJM**.

* 1L = Late break N.C./early make N.O.

⊗ The Cat. No. as listed is incomplete. Select a Coil Voltage Code from the table below to complete the Cat. No.
 Example: 24V DC: Cat. No. **700-K40E-⊗** becomes Cat. No. **700-K40E-ZJ**.

⊗ Coil Voltage Code













The Cat. No. as listed is incomplete. Select a coil voltage code from the table below to complete the Cat. No. Example: 120V, 60 Hz:
Cat. No. 700-K40E becomes **Cat. No. 700-K40E-D**.

AC Voltages [V]	24	110	120	230	240	400	480	600
50 Hz	—	D	—	—	—	—	—	—
60 Hz	—	—	D	—	—	—	B	VC
50/60 Hz	KJ	—	—	KF	KA	KN	—	—

DC Voltages [V]	12	24	110	125	220	250
Standard	ZQ	ZJ	ZD	ZS	ZA	ZT
with Integrated Diode	—	DJ	—	—	—	—







For other voltages, see table on page 31

Auxiliary Contact Blocks

	Description	Connection Diagrams	 		For Use With	Pkg. Qty.	Cat. No.
			N.O.	N.C.			
			0	2	100/104-K, 700-K	1	100-KFA02E
			1	1	100/104-K, 700-K	1	100-KFA11E
			2	0	100/104-K, 700-K	1	100-KFA20E
	Front-mounted auxiliary contacts Auxiliary Contact Blocks 2- and 4-pole versions Choice of contact configurations Snap on, no tools required Electronic-compatible bifurcated contacts for signals down to 15V/2 mA		0	4	100/104-K, 700-K	1	100-KFA04E
			1	3	100/104-K, 700-K	1	100-KFA13E
			2	2	100/104-K, 700-K	1	100-KFA22Z
			3	1	100/104-K, 700-K	1	100-KFA31Z
			4	0	100/104-K, 700-K	1	100-KFA40E



May be ordered in package quantities of 10. Add letter M to the end of the cat. no. Example: **100-KFA02EM**.

Control Modules

	Description	Connection Diagrams	For Use With	Pkg. Qty.	Cat. No.
	Mechanical Interlock For interlocking of two adjacent contactors No added width to contactor assembly Front mount Plug-In type Optional auxiliary contact blocks and suppressor modules mount onto the interlock		100-K, 700-K (AC & DC Control)	1	100-KMCH
	Surge Suppressor Plug-in Type Limits surge voltage on coil drop-off		100/104-K, 700-K	1	100-KFSC50
				1	100-KFSC280
				1	100-KFSC480
			100/104-K, 700-K	1	100-KFSV55
				1	100-KFSV136
				1	100-KFSV277
	100/104-K, 700-K	1	100-KFSD250		

May be ordered in package quantities of 10. Add letter M to the end of the cat. no. Example: **100-KFSC50M**.

Marking Systems

	Description	Pkg. Qty.	Cat. No.
	Label Sheet 10 sheets with 105 self-adhesive paper labels each, 6 x 17 mm	10	100-FMS
	Snap-In Hinged Marker Card	5	1492-MH6X12



Bulletin 193-K — Miniature Bimetallic Overload Relays

- Standard motor protection for AC and DC motors
- Overload protection Trip Class 10A
- Auxiliary switch (1 N.O. and 1 N.C.)
- Phase loss sensitivity
- Manual/Auto reset button
- Test release
- Stop button
- Trip indicator

Bulletin 193-K bimetallic overload relays are designed for use with Bulletin 100-K contactors and Bulletin 104-K Reversing Contactors. These class 10A ambient temperature-compensated thermal overload relays include a differential mechanism for sensitivity to phase-loss conditions.

Table of Contents

Product Selection....	this page
Accessories.....	this page
Specifications.....	29
Approximate Dimensions	31

Conformity to Standards

IEC/EN 60947-1,-4-1,-5-1
 UL 508
 CSA 22.2. No. 14

Approvals

CE marked
 cULus listed (File No. E33916,
 Guide No. NKCR)

Miniature Bimetallic Overload Relays

Mounts to Contactor	Setting Range [A] *	Max. Current Rating Backup gG Fuse [A] IEC Coordination Type		Cat. No.
		Type 1	Type 2	
100-K05...100-K12	0.10...0.16	35	—	193-KA16
	0.16...0.25	35	—	193-KA25
	0.25...0.40	35	2	193-KA40
	0.35...0.50	35	2	193-KA50
	0.45...0.63	35	2	193-KA63
	0.55...0.80	35	4	193-KA80
	0.75...1.0	35	4	193-KB10
	0.9...1.3	35	6	193-KB13
	1.1...1.6	35	6	193-KB16
	1.4...2.0	35	10	193-KB20
	1.8...2.5	35	20	193-KB25
	2.3...3.2	35	20	193-KB32
	2.9...4.0	35	20	193-KB40
	3.5...4.8	35	20	193-KB48
100-K09...100-K12	4.5...6.3	35	20	193-KB63
	5.5...7.5	35	20	193-KB75
100-K12	7.2...10.0	35	20	193-KC10
	9.0...12.5	35	20	193-KC12

To select the setting range for use in Y-Δ Starters, multiply the rated operating current of the motor by a factor of 0.58.

* For motors with Service Factor of 1.15 or greater, use motor nameplate full load current. For motors with service factor of 1.0, use 90% of the motor nameplate full load current.



Bulletin 140M Motor Protection Circuit Breakers

- Current Range 0.1...25 A
- UL Listed for motor loads
 - Short-circuit protection
 - Overload protection
- Visible trip indication
 - Additional short-circuit trip identification
- High current limiting
- High switching capacity

Bulletin 140M Motor Protection Circuit Breakers provide short-circuit and overload protection for individual motor loads. Field-installed accessories make installation and wiring easy.

Table of Contents

Product Selection.... this page
 Accessories 18

Conformity to Standards

IEC/EN 60947-1,-2,-4-1,-5-1
 UL 508
 CSA 22.2. No. 14
 NF F 62-000

Approvals

CE marked
 cULus listed (File No. E54612, Guide No. NLRV and NLRV7)

Product Selection — Motor Protection Circuit Breakers

- Short-circuit protection — standard magnetic trip (fixed at $13 \times I_n$)
- Motor overload protection — Trip Class 10



Rated Operational Current (I_n) [A]	Motor Current Adjustment Range [A]	Magnetic Trip Current [A]	Ultimate Interrupting Current [kA] (I_{cu})		Max. kW, 3-Phase				3-phase Hp Ratings [Hp]				Cat. No.	
			400V	480V	230V	400/415V	500V	690V	200V	230V	460V	575V		
C-Frame														
0.16 A	0.10...0.16	2.1	100	65	—	0.02	—	—	—	—	—	—	—	140M-C2E-A16
0.25 A	0.16...0.25	3.3	100	65	—	0.06	—	—	—	—	—	—	—	140M-C2E-A25
0.40 A	0.25...0.40	5.2	100	65	—	0.09	—	—	—	—	—	—	—	140M-C2E-A40
0.63 A	0.40...0.63	8.2	100	65	0.06...0.09	0.12...0.18	0.18	0.25	—	—	—	—	—	140M-C2E-A63
1.0 A	0.63...1.0	13	100	65	0.12	0.25	0.25...0.37	0.37...0.55	—	—	—	0.5	—	140M-C2E-B10
1.6 A	1.0...1.6	21	100	65	0.18...0.25	0.37...0.55	0.55...0.75	0.75...1.1	—	—	0.5...0.75	0.75	—	140M-C2E-B16
2.5 A	1.6...2.5	33	100	65	0.37	0.75	1.1	1.8	0.5	0.5	0.75...1	1...1.5	—	140M-C2E-B25
4.0 A	2.5...4.0	52	100	65	0.55...0.75	1.1...1.5	1.5...2.2	2.2...3.0	0.75	0.75	1.5...2	2...3	—	140M-C2E-B40
6.3 A	4.0...6.3	82	100	65	1.1...1.5	2.2	2.5...3.0	4.0	1	1...1.5	3	5	—	140M-C2E-B63
10 A	6.3...10	130	100	65	2.2	3.0...4.0	4.0...6.3	5.5...7.5	1.5...2	2...3	5	7.5	—	140M-C2E-C10
16 A	10...16	208	50	30	3.0...4.0	5.5...7.5	7.5...10	11...13	3	—	7.5...10	10	—	140M-C2E-C16
20 A	14.5...20	260	15	30	4.0...5.5	7.5...10	11	15...17	5	5	—	15	—	140M-C2E-C20
25 A	18...25	325	15	25	—	11	15	18.5...22	—	7.5	15	20	—	140M-C2E-C25

Horsepower/kW ratings shown in the table above are for reference. **The final selection of the MPCB depends on the actual motor full load current and service factor.**

Motor Circuit Protectors

- No motor overload protection, only magnetic trip
- For Trip Class 10 motor applications*
- Separate overload relay required for motor protection



Rated Operational Current [A] (I _e)	Magnetic Trip Current [A]	Ultimate Interrupting Current [kA], (I _{cm})		3-phase kW Ratings				3-phase Hp Ratings [Hp]				Cat. No.
		400V	480V	230V	400/415V	500V	690V	200V	230V	460V	575V	
C-Frame												
0.16 A	2.1	100	65	—	0.02	—	—	—	—	—	—	140M-C2N-A16
0.25 A	3.3	100	65	—	0.06	—	—	—	—	—	—	140M-C2N-A25
0.40 A	5.2	100	65	—	0.09	—	—	—	—	—	—	140M-C2N-A40
0.63 A	8.2	100	65	0.06...0.09	0.12...0.18	0.18	0.25	—	—	—	—	140M-C2N-A63
1.0 A	13	100	65	0.12	0.25	0.25...0.37	0.37...0.55	—	—	—	0.5	140M-C2N-B10
1.6 A	21	100	65	0.18...0.25	0.37...0.55	0.55...0.75	0.75...1.1	—	—	0.5...0.75	0.75	140M-C2N-B16
2.5 A	33	100	65	0.37	0.75	1.1	1.8	0.5	0.5	0.75-1	1...1.5	140M-C2N-B25
D-Frame												
2.5 A	33	100	65	0.37	0.75	1.1	1.8	0.5	0.5	0.75...1	1...1.5	140M-D8N-B25
4.0 A	52	100	65	0.55...0.75	1.1...1.5	1.5...2.2	2.2...3.0	0.75	0.75	1.5...2	2...3	140M-D8N-B40
6.3 A	82	100	65	1.1...1.5	2.2	2.5...3.0	4.0	1	1...1.5	3	5	140M-D8N-B63
10 A	130	100	65	2.2	3.0...4.0	4.0...6.3	5.5...7.5	1.5...2	2...3	5	7.5	140M-D8N-C10
16 A	208	100	65	3.0...4.0	5.5...7.5	7.5...10	11...13	3	—	7.5...10	10	140M-D8N-C16
25 A	325	50	65	—	11	15	18.5...22	5	5...7.5	15	15...20	140M-D8N-C25

Horsepower/kW ratings shown in the table above are for reference. **The final selection of the manual starter depends on the actual motor full load current and service factor.**

* For Heavy Duty (exceeding Trip Class 10) starting applications, please consult your local sales office.

Bulletin 140F Fuse Holders

- Available for UL Class CC or midget fuses and IEC 10 x 38 mm fuses, with or without blown fuse indication
- Lockable in the open position
- Compatible with Bulletin 140M wiring and accessories
- Compact busbar and connectors to Bulletin 100-C and 100-K contactors
- 1 N.O./ 1N.C. auxiliary contact, early break N.C.
- Provides capability for dropping out contactor before breaking current on fuse
- Late make N.O. contact provides positive indication that power circuit is open
- Separate overload relay required for motor protection




Description	Approvals				Cat. No.
	IEC	CE Mark	UL	CSA	
Fuse Holder, CC - 30 A	Yes	Yes	Yes	Yes	140F-D3C-C30
Fuse Holder with Blown Fuse Indication, CC - 30 A	Yes	Yes	Yes	Yes	140F-D3C-C30L
Fuse Holder, Midget - 30 A	Yes	Yes	Yes	Yes	140F-D3M-C30
Fuse Holder with Blown Fuse Indication, Midget - 30 A	Yes	Yes	Yes	Yes	140F-D3M-C30L
Fuse Holder, gG - 32 A	Yes	Yes	No	No	140F-D3F-C30
Fuse Holder with Blown Fuse Indication, gG - 32 A	Yes	Yes	No	No	140F-D3F-C30L
Auxiliary Contact for Fuse Holder (1 N.O. Late Make + 1 N.C. Early Break)	Yes	Yes	Yes	Yes	140F-C-AFA11
















Accessories

		Description					Connection Diagram	For Use With	Cat. No.
		Operator Position			Term. No.	Description			
		OFF	ON	Tripped					
		O	X	O	13-14	N.O. Aux		140M-C, D, F	140M-C-AFA10
		X	O	X	11-12	N.C. Aux		140M-C, D, F	140M-C-AFA01
	Front-Mounted Auxiliary Contact 1-pole or 2-pole No additional space required - Only (1) per MPCB	O	X	O	13-14	N.O. Aux		140M-C, D, F	140M-C-AFA11
		X	O	X	21-22	N.C. Aux			
		O	X	O	13-14	N.O. Aux		140M-C, D, F	140M-C-AFA20
		O	X	O	23-24	N.O. Aux			
		X	O	X	11-12	N.C. Aux		140M-C, D, F	140M-C-AFA02
		X	O	X	21-22	N.C. Aux			
	Right Side-Mounted Auxiliary Contact 2-pole Adds 9 mm to the width of the device - (2) per MPCB	O	X	O	33-34	N.O. Aux		140M-C, D, F	140M-C-ASA20
		O	X	O	43-44	N.O. Aux			
		X	O	X	31-32	N.C. Aux		140M-C, D, F	140M-C-ASA02
		X	O	X	41-42	N.C. Aux			
		O	X	O	33-34	N.O. Aux		140M-C, D, F	140M-C-ASA11
		X	O	X	41-42	N.C. Aux			


X = Contact Closed; O = Contact Open









Accessories


		Description			Term. No.	Description	Connection Diagram *	For Use With	Cat. No.
		Operator Position							
		OFF	ON	Tripped					
	Front-Mounted Trip Contact 2-pole Indicates tripping of device No additional space required	O	X	O	13-14	N.O. Aux		140M-C, D, F	140M-C-AFAR10A10
		O	O	X	27-28	N.O. Trip (Short-Circuit & Overload)			
		X	O	X	11-12	N.C. Aux		140M-C, D, F	140M-C-AFAR10A01
		O	O	X	27-28	N.O. Trip (Short-Circuit & Overload)			
	Right-Side Mounted Trip Contact 2-pole Indicates tripping of Motor Protection Circuit Breaker Adds 9 mm to the width of the circuit breaker - Only (1) per MPCB - A Right-Side mounted Auxiliary Contact may be tandem mounted on top of this Trip Contact	O	O	X	57-58	N.O. Trip (Short-Circuit & Overload)		140M-C, D, F	140M-C-ASAR10M10
		O	O	X	67-68	N.O. Trip			
		O	O	X	57-58	N.O. Trip (Short-Circuit & Overload)		140M-C, D, F	140M-C-ASAR10M01
		X	X	O	65-66	N.C. Trip			
		X	X	O	55-56	N.C. Trip (Short-Circuit & Overload)		140M-C, D, F	140M-C-ASAR01M10
		O	O	X	67-68	N.O. Trip			
		X	X	O	55-56	N.C. Trip (Short-Circuit & Overload)		140M-C, D, F	140M-C-ASAR01M01
		X	X	O	65-66	N.C. Trip			
		O	O	X	77-78	N.O. Trip (Short-Circuit)		140M-C, D, F	140M-C-ASAM11
		X	X	O	65-66	N.C. Trip (Short-Circuit)			

X = Contact Closed; O = Contact Open



	Description	For Use With	Cat. No.	
	ECO Connecting Module For DOL and reversing starters Provides electrical and mechanical link	140M-C to 100-K	140M-C-PEK12	
	Spacing Adapter Required for Self-Protected combination motor controller (Type E) applications of 140M-C, -D, and -F MPCBs	140M-C, -D	140M-C-TE1	
	Compact Busbar Feeder Block Supply of compact busbars Increases terminal capacity	140M-C, -D	140M-C-WBE	
	Compact Busbar Feeder Terminal For supply of commoning links Top feed — overlaps commoning link Meets UL Type E spacing requirements	140M-C, -D	140M-C-WTE	
	Three-Phase Compact Busbar for 25 A Motor Protection Circuit Breakers — 63 A Max. Continuous Current 45 mm spacing For use with front-mounted auxiliary contact	2 connections	140M-C, -D	140M-C-W452
		3 connections		140M-C-W453
		4 connections		140M-C-W454
		5 connections		140M-C-W455
	Three-Phase Compact Busbar for 25 A Motor Protection Circuit Breakers — 63 A Max. Continuous Current 54 mm spacing For use with side-mounted auxiliary contact	2 connections	140M-C, -D	140M-C-W542
		3 connections		140M-C-W543
		4 connections		140M-C-W544
		5 connections		140M-C-W545
	Three-Phase Compact Busbar for 25 A Motor Protection Circuit Breakers — 63 A Max. Continuous Current 63 mm spacing For use with side-mounted undervoltage trip and shunt trip	2 connections	140M-C, -D	140M-C-W632
		3 connections		140M-C-W633
		4 connections		140M-C-W634
		5 connections		140M-C-W635
	Jumper for 140M-D to 140M-C Accommodates difference in depth from 140M-D to 140M-C 54 mm spacing Can be used with all other commoning links	2 connections	140M-D to 140M-C	140M-C-WD542

For complete list of available 140M accessories, please consult the Allen-Bradley **Industrial Controls** main catalog.

	<p>Modular Eco Starter Selection</p> <ul style="list-style-type: none"> • Power Range 0.1...12 A • Modular Eco Starter using Bulletin 140M Motor Protection Circuit Breaker and Bulletin 100-K Mini Contactors • Mounting Options: Snap Fixing on (1) 35 mm DIN Rail 	<p>Table of Contents</p> <p>Product Selection this page</p>
---	--	---

Use the chart to select components based on motor application data.

Mini Starters

Motor Current Adjustment Range [A]	Type 1 Coordination, Max. Fault Current I_q 50 kA								Eco Starters	
	Max. Hp (60 Hz)				Max. kW (50 Hz)				DOL Starters	Reversing Starters
	200V	230V	460V	575V	230V	400V	500V	690V	Cat. No.	Cat. No.
C-Frame and 100-K Mini Contactors										
0.1...0.16	—	—	—	—	—	—	—	0.06	190E-KMN®2-CA16X	191E-KMN®1-CA16X
0.16...0.25	—	—	—	—	—	0.06	0.06	0.09	190E-KMN®2-CA25X	191E-KMN®1-CA25X
0.25...0.4	—	—	—	—	—	0.09	0.09...0.12	0.12...0.18	190E-KMN®2-CA40X	191E-KMN®1-CA40X
0.4...0.63	—	—	—	—	0.06...0.09	0.12...0.18	0.18	0.25	190E-KMN®2-CA63X	191E-KMN®1-CA63X
0.63...1	—	—	—	1/2	0.12	0.25	0.25...0.37	0.37...0.55	190E-KMN®2-CB10X	191E-KMN®1-CB10X
1...1.6	—	—	1/2	3/4	0.18...0.25	0.37...0.55	0.55	0.75...1.1	190E-KMN®2-CB16X	191E-KMN®1-CB16X
1.6...2.5	1/2	1/2	3/4...1	1...1-1/2	0.37	0.75	0.75...1.1	1.5	190E-KMN®2-CB25X	191E-KMN®1-CB25X
2.5...4	1/2...3/4	3/4	1-1/2...2	2...3	0.55...0.75	1.1...1.5	1.5	2.2	190E-KMN®2-CB40X	191E-KMN®1-CB40X
2.5...4	1/2...3/4	3/4	1-1/2...2	2...3	0.55...0.75	1.1...1.5	1.5	2.2...3	190E-KNN®2-CB40X	191E-KNN®1-CB40X
4...6.3	1	1...1-1/2	3	—	1.1...1.5	2.2	2.2	—	190E-KMN®2-CB63X	191E-KMN®1-CB63X
4...6.3	1	1...1-1/2	3	5	1.1...1.5	2.2	2.2...3	4	190E-KNN®2-CB63X	191E-KNN®1-CB63X
6.3...10	2	2	5	—	2.2	3...4	4	—	190E-KNN®2-CC10X	191E-KNN®1-CC10X
6.3...10	2	2...3	5	7-1/2	2.2	3...4	4	5.5	190E-KPN®2-CC10X	191E-KPN®1-CC10X
10...16	3	—	—	—	3	5.5	5.5	—	190E-KPN®2-CC16X	191E-KPN®1-CC16X

Reversing Starters using 2 contactors 100-K.®01, power wiring kit 100-KPR and mechanical interlock 100-KMCH.

Horsepower and Kilowatt ratings shown in the table are for reference. Final selection of the starter depends upon the actual motor full-load current and service factor.

⊗ **Coil Voltage Code**

The Cat. No. as listed is incomplete. Select a coil voltage code from the table below to complete the Cat. No. Example: 120V, 60 Hz: **Cat. No. 100-K09⊗10** becomes **Cat. No.100-K09D10**.

AC Voltages [V]	24	110	120	230	240	400	480	600
50 Hz	—	D	—	—	—	—	—	—
60 Hz	—	—	D	—	—	—	B	VC
50/60 Hz	KJ	—	—	KF	KA	KN	—	—

DC Voltages [V]	12	24	110	125	220	250
Standard	ZQ	ZJ	ZD	ZS	ZA	ZT
with Integrated Diode	—	DJ	—	—	—	—

For other voltages, see table on page 31

IEC Specifications

		100/104-K		
		05	09	12
AC-1 Active Power Load (50 Hz); Ambient temperature 40°C				
≤ 690V	[A]	20	20	20
230V	[kW]	8	8	8
240V	[kW]	8.3	8.3	8.3
400V	[kW]	14	14	14
415V	[kW]	14	14	14
500V	[kW]	17	17	17
690V	[kW]	24	24	24
Ambient temperature 60°C				
≤ 690V	[A]	16	16	16
230V	[kW]	6.4	6.4	6.4
240V	[kW]	6.7	6.7	6.7
400V	[kW]	11	11	11
415V	[kW]	12	12	12
500V	[kW]	14	14	14
690V	[kW]	19	19	19
Switching of 3-phase Motors; (50 Hz) Ambient temperature 60°C, AC-2, AC-3, AC-4				
230V	[A]	6.3	11.3	11.3
240V	[A]	6.3	11.3	11.3
400V	[A]	4.9	8.5	11.5
415V	[A]	4.9	8.5	11.5
500V	[A]	3.9	6.8	9.2
690V	[A]	2.8	4.9	6.7
230V	[kW]	1.5	3	3
240V	[kW]	1.5	3	3
400V	[kW]	2.2	4	5.5
415V	[kW]	2.2	4	5.5
500V	[kW]	2.2	4	5.5
690V	[kW]	2.2	4	5.5
AC-4 at approximately 200,000 operations				
230V	[A]	2.3	3.9	3.9
240V	[A]	2.3	3.9	3.9
400V	[A]	2	3.6	3.6
415V	[A]	2	3.6	3.6
500V	[A]	1.9	3.2	3.2
690V	[A]	—	—	—
230V	[kW]	0.37	0.75	0.75
240V	[kW]	0.37	0.75	0.75
400V	[kW]	0.75	1.5	1.5
415V	[kW]	0.75	1.5	1.5
500V	[kW]	0.75	1.5	1.5
690V	[kW]	—	—	—
Max. switching frequency	Ops/h	250	250	250

		100/104-K			
		05	09	12	
Star-Delta Starting (50 Hz)					
≤ 230V	[A]	11.3	20	20	
≤ 240V	[A]	11.3	20	20	
400V	[A]	8.5	15.5	15.5	
415V	[A]	8.5	15.5	15.5	
500V	[A]	6.8	12.4	12.4	
690V	[A]	4.9	8.9	8.9	
230V	[kW]	3	5.5	5.5	
240V	[kW]	3	5.5	5.5	
400V	[kW]	4	7.5	7.5	
415V	[kW]	4	7.5	7.5	
500V	[kW]	4	7.5	7.5	
690V	[kW]	4	7.5	7.5	
Load Carrying Capacity per UL/CSA					
General Purpose Current (enclosed)					
	[A]	12	15	18	
Rated power (enclosed)					
1-phase (100-K)	115V	[A]	9.8	9.8	13.8
	230V	[A]	8	10	12
	115V	[Hp]	0.5	0.5	0.75
	230V	[Hp]	1	1.5	2
3-phase	200V	[A]	6.9	7.8	11
	230V	[A]	6	6.8	9.6
	460V	[A]	4.8	7.6	11
	575V	[A]	3.9	6.1	9
	200V	[Hp]	1.5	2	3
	230V	[Hp]	1.5	2	3
	460V	[Hp]	3	5	7.5
	575V	[Hp]	3	5	7.5
Wye-Delta (60 Hz)					
	200V	[Hp]	2.5	3.3	5
	230V	[Hp]	2.5	3.3	5
	460V	[Hp]	5	8.5	12
	575V	[Hp]	5	8.5	12




IEC Specifications

			100/104-K		
			05	09	12
Switching of Power Transformers, AC-6a (50 Hz)					
Inrush Current = n					
Rated transformer current					
n = 30	≤ 230V	[A]	2.9	5.4	5.4
	≤ 240V	[A]	2.9	5.4	5.4
	≤ 400V/415V	[A]	2.4	4.1	5.4
	≤ 500V	[A]	1.8	3.2	3.2
	≤ 690V	[A]	—	—	—
	230V	[kVA]	1.2	2	2
	240V	[kVA]	1.2	2	2
	400V	[kVA]	1.7	2.8	3.4
	415V	[kVA]	1.7	2.8	3.4
	500V	[kVA]	1.7	2.8	3.4
	690V	[kVA]	2	4	5
n = 20	≤ 690V	[A]	—	—	—
n = 15	≤ 690V	[A]	—	—	—
Switching of Lamps					
Gas discharge lamps AC-5a 220...240V AC (40 °C)					
	open	[A]	18	18	18
	closed	[A]	14.5	14.5	14.5
Individually compensated:					
Max. capacitance at expected					
Short-circuit current of					
	10 kA	[μF]	750	750	750
	20 kA	[μF]	400	400	400
	50 kA	[μF]	—	—	—
Filament AC-5b	230/240V	[A]	5	9	9
Switching of Low Inductive Loads in Home Appliances and Similar Applications per IEC 61095 (50 Hz)					
AC-7a					
	230V	[A]	20	20	20
	400V	[A]	20	20	20
Switching of Motor Load for Home Appliances (50 Hz)					
AC-7b					
	230V	[A]	6	11	11
	400V	[A]	6	11	11
Switching of hermetically encapsulated cooling compressor motors with manual reset of the overload release					
AC-8a					
	400V	[A]	11	18	18
	500V	[A]	10	15	15

Specifications

			100/104-K			
			05	09	12	
Switching of DC Loads						
Non-inductive/slightly inductive loads or resistance furnaces DC-1 at 60 °C						
1 pole (100-K)		24V	[A]	6	9	9
		48/60V	[A]	4/1	6/1.5	6/1.5
		110V	[A]	0.6	1	1
		220V	[A]	0.2	0.3	0.3
		440V	[A]	0.08	0.1	0.1
2 poles in series		24V	[A]	6	9	9
		48/60V	[A]	6	8	8
		110V	[A]	4	6	6
		220V	[A]	0.8	1.2	1.2
		440V	[A]	0.2	0.3	0.3
3 poles in series		24V	[A]	6	9	9
		48/60V	[A]	6	9	9
		110V	[A]	6	9	9
		220V	[A]	3	4	4
		440V	[A]	0.4	0.6	0.6
Shunt-wound Motors						
Starting, reverse current braking, reversing, stepping DC-3, 60 °C						
3 poles in series		24V	[A]	5	9	9
		48/60V	[A]	4	6	6
		110V	[A]	2	3	3
		220V	[A]	0.8	1.2	1.2
		440V	[A]	0.15	0.2	0.2
Series-wound Motors						
Starting, reverse current braking, reversing, stepping DC-5, 60 °C						
3 poles in series		24V	[A]	5	9	9
		48/60V	[A]	2	3	3
		110V	[A]	0.6	1	1
		220V	[A]	0.1	0.1	0.1
		440V	[A]	—	—	—
Short Time Withstand I_{CW}, 60 °C						
	10 s	[A]	60	96	96	
Resistance and Power Dissipation						
Main current circuit resistance, 1 pole			[mΩ]	2.2	2.2	2.2
Power dissipation, 3 main poles I_e AC-3/400V				0.3	0.9	0.9
Total power dissipation						
At I_e AC-3/400V		AC control, warm	[W]	2.1	2.7	2.7
		DC control, warm	[W]	2.9	3.5	3.5
Lifespan						
Mechanical			[Mio. op.]	15	15	15
Electrical AC-3 (400 V)			[Mio. op.]	0.7	0.7	0.7
Reversing combination mechanical, electrical			[Mio. op.]	0.7	0.7	0.7
Weight						
AC		DOL	kg (lbs.)	0.16 (0.35)	0.16 (0.35)	0.16 (0.35)
		Reversing	kg (lbs.)	—	—	—
DC		DOL	kg (lbs.)	0.2 (0.44)	0.2 (0.44)	0.2 (0.44)
		Reversing	kg (lbs.)	—	—	—

Cross Sections

Conductor Cross Sections - Main Contacts and Auxiliary Contacts				100/104-K		
				05	09	12
Terminal type						
	Fine stranded with ferrule	(1) Conductor (2) Conductors	[mm ²] [mm ²]	0.75...2.5 0.75...2.5		
	Solid or coarse stranded	(1) Conductor (2) Conductors	[mm ²] [mm ²]	1...4 1...2.5 + 1...4		
Recommended torque				[Nm]	1.2	
Cross section per UL/CSA				[AWG]	18...12 *	
Recommended torque				[lb-in]	10.6	

Pozidriv No. 2 / Blade No. 3 screw
 * Use same cross sections



Coil Data

				100/104-K		
				05	09	12
Operating Limits						
AC control 50 Hz, 60 Hz, 50/60 Hz	pick-up	[x U _s]	0.85...1.1			
	dropout	[x U _s]	0.2...0.75			
DC control	pick-up	[x U _s]	0.8...1.1 9, 12, 24, 110V DC: 0.7...1.25			
	dropout	[x U _s]	0.1...0.75			
Coil Consumption						
AC control 50 Hz, 60 Hz, 50/60 Hz	pick-up	[VA/W]	35/32			
	hold-in	[VA/W]	5/1.8			
DC control	pick-up	[W]	cold 3.0, warm 2.6			
	hold-in	[W]	cold 3.0, warm 2.6			
Operating Times						
AC	closing delay	[ms]	15...40			
	opening delay	[ms]	15...33			
With RC module	opening delay	[ms]	15...28			
DC	closing delay	[ms]	18...40			
	opening delay	[ms]	6...12			
With integrated diode	opening delay	[ms]	8...12			
With external diode	opening delay	[ms]	35...50			
Minimal change over-time for reversing		[ms]	>50			

Short Circuit Coordination

		100/104-K		
		05	09	12
Short Circuit Coordination (Max. Fuse or Circuit Breaker Rating)				
Per IEC 60947-4-1 (contactor and fuses only)				
DIN Fuses - gG		50 kA Available Fault Current		
Type "1" (690V)	[A]	35	35	35
Type "2" (690V)	[A]	16	20	20

Auxiliary Contacts and Auxiliary Contact Blocks

	Auxiliary contacts		
	Internal (100-K)	Blocks (100-KF)	
Switching of AC Loads			
AC-12 I_{th}	at 40°C [A]	10	10
	at 60°C [A]	6	6
AC-15 at rated voltage of			
	24V [A]	6	3
	120V [A]	6	3
	240V [A]	3	2
	400V [A]	1.8	1.2
	480V [A]	1.5	1
	500V [A]	1.4	1
	600V [A]	1.2	0.6
	690V [A]	1	0.6
Switching of DC Loads			
DC-12 L/R < 1 ms resistive loads at			
	24V DC [A]	6	—
	48V DC [A]	4	—
	110V DC [A]	0.6	—
	125V DC [A]	0.6	—
	220V DC [A]	0.2	—
	250V DC [A]	0.2	—
	400V DC [A]	0.08	—
	440V DC [A]	0.08	—
DC-14 L/R < 15 ms inductive loads with economy resistor in series at			
	24V DC [A]	4	—
	48V DC [A]	2.5	—
	110V DC [A]	0.4	—
	125V DC [A]	0.4	—
	220V DC [A]	0.12	—
	250V DC [A]	0.12	—
	400V DC [A]	0.05	—
	440V DC [A]	0.05	—
DC-13 switching electromagnets at			
	24V DC [A]	2.8	2.3
	48V DC [A]	1.2	1
	110V DC [A]	0.55	0.55
	125V DC [A]	0.55	0.55
	220V DC [A]	0.27	0.27
	250V DC [A]	0.27	0.27
	400V DC [A]	0.15	0.15
	440V DC [A]	0.15	0.15
	600V DC [A]	0.1	0.1
Fuse gG			
Short-circuit protection with no Welding of contacts per IEC 60947-5-1			
	 [A]	10	10
	 [A]	10	10
Protective Separation per IEC 60947-1, Annex N			
		—	—
Min. switching capacity 15V IEC 60947-5-4 [mA]			
		—	2
Load Carrying Capacity per UL/CSA			
Rated voltage	AC [V]	max. 600	max. 600
Continuous rating	40 °C [A]	10	10
Switching capacity	AC [A]	A 600	B 600
Rated voltage	DC [V]	max. 600	max. 600
Switching capacity	DC [A]	Q 600	Q 600

General Data

Rated Isolation Voltage U_i		
IEC [V]		690
UL, CSA [V]		600
Rated Impulse Voltage Withstand U_{imp} [kV]		6
Rated Operating Voltage U_e		
AC 50/60 Hz [V]		230, 240, 400, 415, 500, 690
DC [V]		24, 48, 110, 220, 440
Insulation Class of the Coil		Class F according to IEC 60085, Class 105 insulation system according to UL 508
Rated coil frequency		AC 50/60 Hz, DC
Ambient Temperature		
Storage [°C]		-55...+80
Operation at rated voltage [°C]		-25...+60
at 70°C		15% current reduction against 60°C values
Climatic Withstand		IEC 68-2/EN 60068
Max. Altitude of Installation Site [m]		2000 NN
Protection Class		IP2X
Single contactor cover		—
Contactor with frame terminal block		—
Auxiliary contact		IP2X
Resistance to Shock		IEC 68-2/EN 60068
Resistance to Vibration		IEC 68-2/EN 60068
Mechanically Linked Contacts IEC 60947-5-1, Annex L		100-K (on main unit)
Mirror Contacts IEC 60947-4 Annex F		100-K and 100-KF
Standards		IEC/EN 60947-1, -4-1, -5-1, -5-4, UL 508, CSA 22.2. No. 14
Approvals		CE, cULus

Life-Load Curves

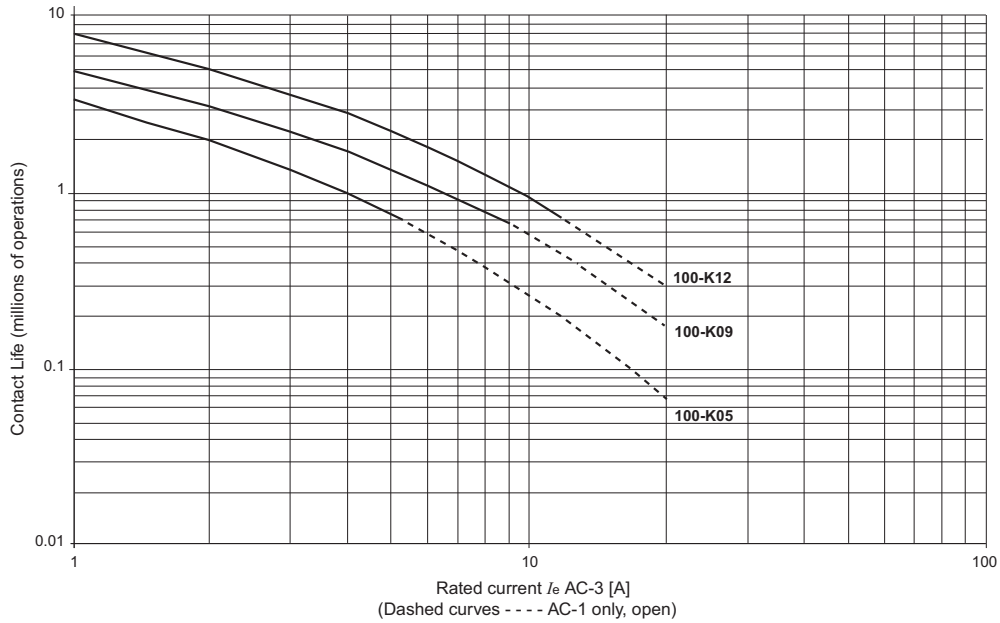
Electrical life; $U_e = 400...460V$ AC

AC-3

Switching of squirrel-cage motors while starting

AC-1

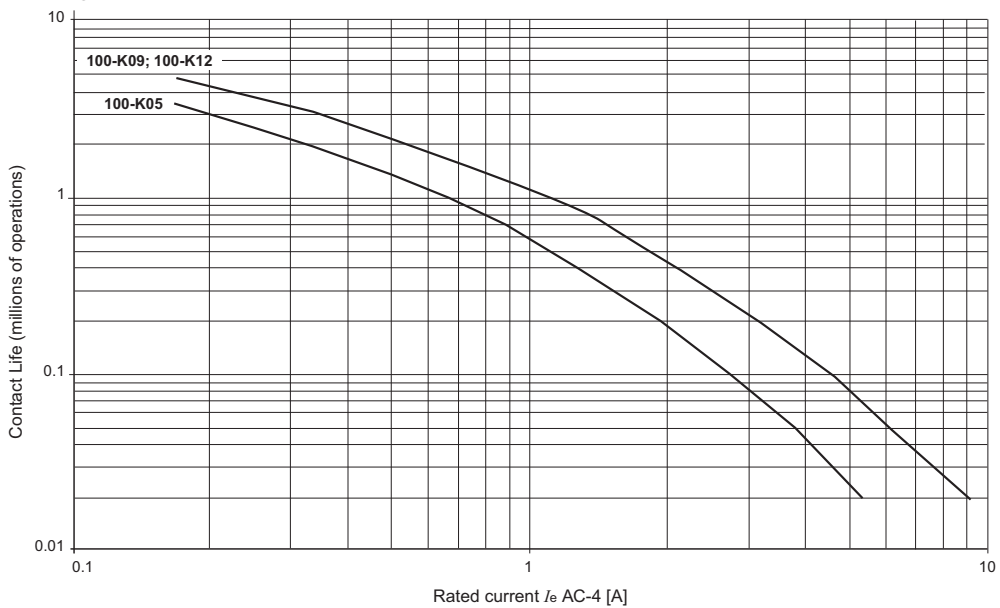
Non- or slightly inductive loads, resistance furnaces



Electrical life; $U_e = 400...460V$ AC

AC-4

Stepping of squirrel-cage motors






IEC Specifications

		700-K
AC-12 Rated Thermal Current		
Ambient temperature 40°C		
24...240V	[A]	10
230...500V	[A]	10
230...690V	[A]	10
Ambient temperature 60°C		
24...240V	[A]	6
230...500V	[A]	6
230...690V	[A]	6
AC-15/B600		
Switching of Solenoids and contactors		
24V	[A]	3
48V	[A]	3
120V	[A]	3
230V	[A]	2
240V	[A]	2
400V	[A]	1.2
480V	[A]	1
500V	[A]	1
600V	[A]	0.6
690V	[A]	0.6
Short-circuit Protection		
"gG" Fuse acc. to IEC 60947-5-1, no welding of contacts		
Fuse gG	[A]	10
Min. Switching Capacity 15V		
For bifurcated contacts (control relays and auxiliary contact blocks)		
	[mA]	2
Resistance and Power Dissipation		
Main current circuit resistance, 1 pole	[mΩ]	6.5
	[W]	2.6
Total power dissipation		
I_{th} AC control, warm	[W]	4.4
DC control, warm	[W]	5.2
Lifespan		
Mechanical	[Mio. op.]	15
Electrical AC-15 (240V / 2 A)	[Mio. op.]	0.7
Weight		
AC control	kg (lbs.)	0.16 (0.35)
DC control	kg (lbs.)	0.2 (0.44)
Load Carrying Capacity per UL/CSA		
Rated voltage AC	[V]	max. 600
Continuous rating 40 °C	[A]	10
Switching capacity AC	[A]	B 600
Rated voltage DC	[V]	max. 600
Switching capacity DC	[A]	Q 600

		700-K	
Continuous Current			
(General Purpose)	300V AC	[A]	5
	600V AC	[A]	10
DC-13/Q600			
1 pole	24V	[A]	2.3
	48V	[A]	1
	110V	[A]	0.55
	125V	[A]	0.55
	220V	[A]	0.27
	250V	[A]	0.27
	400V	[A]	0.15
	440V	[A]	0.15
	600V	[A]	0.1

Cross Sections

Conductor Cross Sections - Main Contacts and Auxiliary Contacts				700-K
Terminal type				
	Fine stranded with ferrule	(1) Conductor (2) Conductors	[mm ²] [mm ²]	0.75...2.5 0.75...2.5
	Solid or coarse stranded	(1) Conductor (2) Conductors	[mm ²] [mm ²]	1...4 1...2.5 + 1...4
Recommended torque				[Nm] 1.2
Cross section per UL/CSA				[AWG] 18...12 *
Recommended torque				[lb-in] 10.6

Posidriv No. 2 / Blade No. 3 screw

* Use same cross sections

Coil Data




			700-K
Operating Limits			
AC control 50 Hz, 60 Hz, 50/60 Hz	pick-up	[x U _s]	0.85...1.1
	dropout	[x U _s]	0.2...0.75
DC control	pick-up	[x U _s]	0.8...1.1 9, 12, 24, 110V DC: 0.7...1.25
	dropout	[x U _s]	0.1...0.75
Coil Consumption			
AC control 50 Hz, 60 Hz, 50/60 Hz	pick-up	[VA/W]	35/32
	hold-in	[VA/W]	5/1.8
DC control	pick-up	[W]	cold 3.0, warm 2.6
	hold-in	[W]	cold 3.0, warm 2.6
Operating Times			
AC	closing delay	[ms]	15...40
	opening delay	[ms]	15...33
With RC module	opening delay	[ms]	15...28
DC	closing delay	[ms]	18...40
	opening delay	[ms]	6...12
With integrated diode	opening delay	[ms]	8...12
With external diode	opening delay	[ms]	35...50

General Data

		700-K
Rated Isolation Voltage U_i		
IEC	[V]	690
UL, CSA	[V]	600
1 minute acc. to IEC 60947-5-1	[V]	—
Rated Impulse Voltage Withstand U_{imp}	[kV]	6
Rated Operating Voltage U_e		
AC 50/60 Hz	[V]	24, 48, 120, 230, 400, 500, 600, 690
DC	[V]	24, 48, 110, 220, 440
Rated Coil Frequency		
AC 50/60 Hz, DC		
Ambient Temperature		
Storage	[°C]	-55...+80
Operation at rated voltage	[°C]	-25...+60
at 70°C		15% current reduction against 60°C values
Climatic Withstand		
—		
Max. Altitude of Installation Site	[m]	2000 NN
Protection Class		
IP2X		
Auxiliary contact		
—		
Standards		
IEC/EN 60947-1, -5-1, -5-4, UL 508, CSA 22.2. No. 14		
Approvals		
CE, cULus		

Specifications




Main Circuits

		193-K
Rated Isolation Voltage U_i		690V
Rated Impulse Strength U_{imp}		6 kV
Rated Operating Voltage U_e	IEC/UL	690V AC / 600V AC
Wiring cross section Terminal type		
Terminal screws		M3.5
	Fine stranded with ferrule [mm ²]	2 x (1.5...4)
	Solid or coarse stranded [mm ²] [AWG]	2 x (1.5...4) 2 x (16...10)
Recommended torque	[Nm] [lb-in]	1.2 10.6
Pozidriv screwdriver	Size	2
Slotted screwdriver	[mm]	1 x 6

Environmental Ratings

		193-K
Ambient Temperature	Storage Operating	-55...+80 °C (-67...+176 °F) -20...+60 °C (-4...+140 °F)
Humidity	Operating Damp Heat	5...95 % Non-condensing per IEC 68-2-3 and IEC 68-2-30
Vibration (per IEC 68-2-6)		3G
Shock (per IEC 68-2-27)		30G
Max. Altitude		2000 m
Pollution Environment		Pollution Degree 3
Degree of Protection		IP2X
Protection		
Type of Relay		Ambient Compensated, Time Delay, Phase Loss Sensitive
Nature of Relay		Bimetallic Overload Relay
Trip Rating		120 % FLA
Trip Class		IEC: 10A, UL 10
Reset Mode		Automatic or Manual
Power dissipation	up to 0.4 A	7 W
	0.5...12.5 A	6 W



Control Circuits

		193-K
Rated Isolation Voltage U_i		690V AC
Rated Impulse Strength U_{imp}		4 kV AC
Rated Operating Voltage U_e	IEC/UL	690V AC / 600V AC
Rating Designation		A600 / Q300 N.O./N.C.
AC-15	24V [A]	4
	240V [A]	2
	400V [A]	1.6
	690V [A]	0.15
DC-13	24V [A]	2
	110V [A]	0.4
	220V [A]	0.25
	440V [A]	0.08
	[A]	5
Short-circuit withstand, fuse gG		[A] 6
Contact Reliability		15V, 2 mA
Wiring cross section Terminal type		
Terminal screw		M 3.5
	Fine stranded with ferrule [mm ²]	2 x (1...4)
	Solid or coarse stranded [mm ²] [AWG]	2 x (1...4) 2 x (18...12)
Recommended torque	[Nm] [lb-in]	1.2 10.6
Pozidriv screwdriver	Size	2
Slotted screwdriver	[mm]	1 x 6

General Data

		193-K
Standards		IEC/EN 60947-1, -4-1, -5-1, UL 508, CSA 22.2. No. 14
Certifications		CE, cULus
Approximate Weights (unpacked)		0.115 kg (0.25 lb)

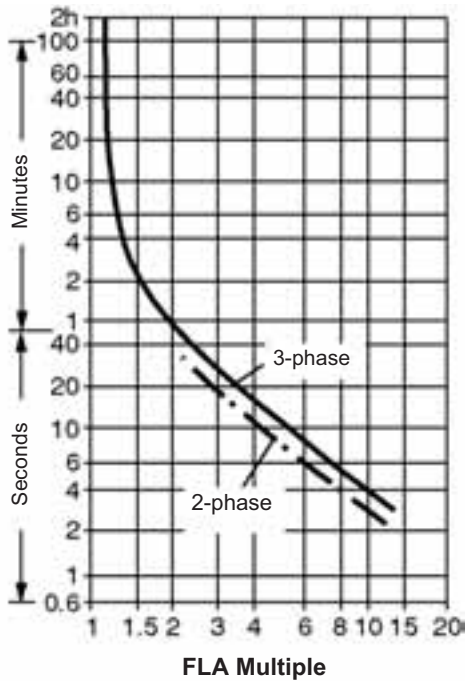
Thermal Overload Relays
 Circuit Diagrams



Trip Characteristics

These trip characteristics refer to IEC 60947 and are average values from cold start at an ambient temperature of 20 °C. Trip time is pictured as a function of operating current. With the device at normal operating temperature, the trip time decreases to approximately 25% of the shown value.

Trip Class 10A



Coil Voltage Codes

AC Coil Voltages			
[V]	50 Hz	60 Hz	50/60 Hz
12	—	—	KQ
24	—	—	KJ (WJ)
32	—	—	VU
36	—	—	KV
42	—	—	KW
48	—	—	KY
60	—	—	KR
70	—	—	VG
110	D (WD)	—	—
120	—	D (WD)	—
127	—	—	VS
135	—	—	VE
200	KG	—	—
200-220	—	—	KG
230	—	—	KF (WF)
240	—	—	KA
250	—	—	VT
380-400	N	—	—
400	—	—	KN
415	—	—	KU
440	B	—	—
480	—	B	—
500	M	—	—
525	VC	—	—
575	—	M	—
600	—	VC	—

Voltage codes in bold are preferred products. For availability of other voltage codes, please consult your local Allen-Bradley distributor or representative.

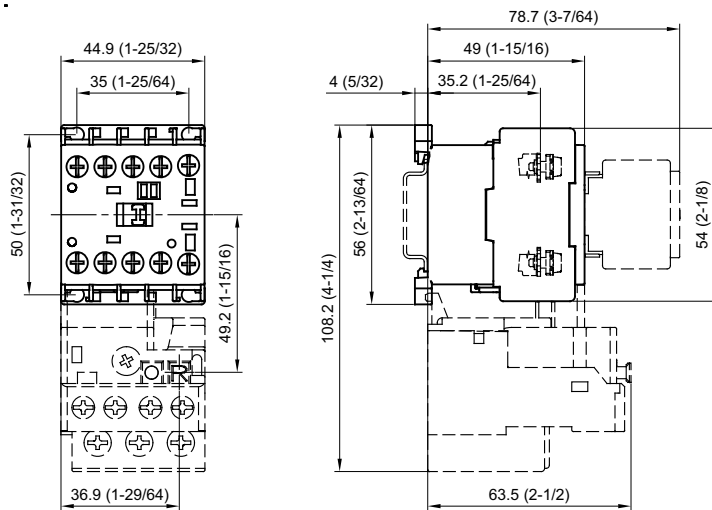
(Wx): with built-in Varistor

DC Coil Voltages	
[V]	DC
9	ZR
12	ZQ
24	ZJ (DJ)*
30	ZC
36	ZW
48	ZY
60	ZZ
72	ZG
80	ZE
110	ZD
120	ZU
125	ZS
220	ZA
240	ZL
250	ZT

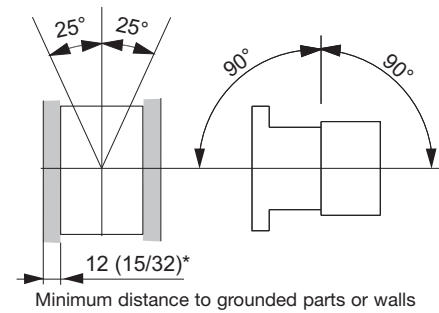
* (DJ): with integrated Diode

Bulletin 100-K, 700-K, 193-K Approximate Dimensions

Dimensions are shown in millimeters (inches). Dimensions are not intended for manufacturing purposes.



Mounting Position



Rockwell_Power_Modular_Control_System_Select_en_0611.pdf

KLINKMANN

www.klinkmann.com

Helsinki

tel. +358 9 540 4940
automation@klinkmann.fi

Yekaterinburg

tel. +7 343 376 5393
yekaterinburg@klinkmann.spb.ru

Vilnius

tel. +370 5 215 1646
post@klinkmann.lt

St. Petersburg

tel. +7 812 327 3752
klinkmann@klinkmann.spb.ru

Samara

tel. +7 846 273 95 85
samara@klinkmann.spb.ru

Tallinn

tel. +372 668 4500
klinkmann.est@klinkmann.ee

Moscow

tel. +7 495 641 1616
moscow@klinkmann.spb.ru

Kiev

tel. +38 044 495 33 40
klinkmann@klinkmann.kiev.ua

Riga

tel. +371 6738 1617
klinkmann@klinkmann.lv

Minsk

tel. +375 17 200 0876
minsk@klinkmann.com