

The information below is provided to facilitate using our catalogue.

Product hierarchy

for example, RAFIX 16 control components

- Chapter (control components)
- Product family (RAFIX 16)
- Product group (RAFIX 16 pushbuttons)
- Product version (RAFIX 16 pushbutton with flat lens)
- Product: 1.30.070.251/0303

Product families e.g. RAFIX 16 control components

Order: The product families appear in ascending order according to mounting hole diameter or size within the individual chapters.

Product group (e.g. RAFIX 16 pushbuttons)

• Technical data

The specified data are valid for all products within the product group; any deviating data are specified with the individual versions.

• Typical accessories

Frequently used accessory products for the product group are listed here. For additional accessory types, refer to the page numbers specified.

Product versions e. g. RAFIX 16 pushbutton with flat lens

- The **order blocks** summarise the products with the same appearance and dimensions.
- **Version accessories:** Accessories which are suitable for all products of the specific version or the order block.

RoHS Compliance of RAFI Components




The products in this catalogue are RoHS compliant (RoHS = Restriction of Hazardous Substances). Those components are qualified for leadfree soldering. Details see glossary.

Stock items

The order numbers of stock items are **printed in bold type** in the catalogue. Stock items are usually available in commercial quantities within one week.

Download drawings in dxf- and step-format from the Internet

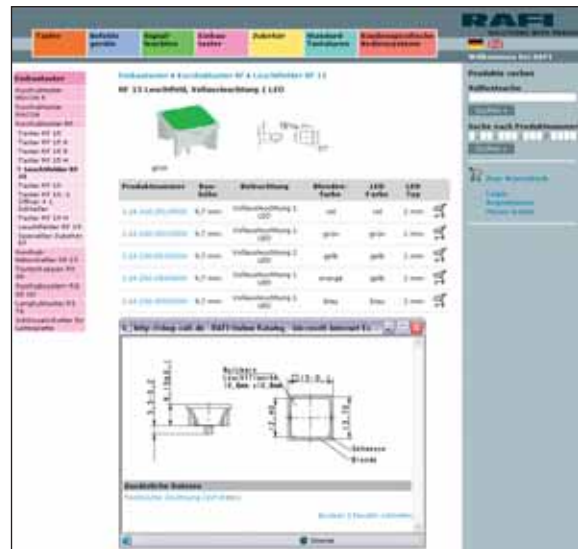

Most of the drawings used in the catalogue can be downloaded from the Internet in dxf file format. Drawings of some products are also available in the 3D formats *.step.

The data are available for download in our Online Catalogue at <http://www.rafi.de>. As soon as the individual product is displayed with data and graphics, you can download the **drawings by clicking on it with the right-hand** mouse key.

Download of correction sheets and PDF catalogues

You can always download the several chapters of our catalogue and correction sheets to this catalogue from the chapter PDF-documents.

In our Online Catalogue you can create **PDF data sheets** from individual products: Find and display the desired product using the search tree or by entering the order number. You can then generate a PDF document with the information displayed by clicking the "Generate product data sheet" button.

Disclaimer

Subject to technical modification. The information contained herein is solely intended for product description and shall not be interpreted as warranted qualities in a legal sense. Any claims for damages against us – regardless for which legal basis – shall be excluded unless we should be liable for intent or gross negligence.



Pushbuttons

8 mm Series
LUMOTAST FK
LUMOTAST 25
LUMOTAST 75 IP40
LUMOTAST 75 IP65
Other keylock switches
Other pushbuttons

1



Control Components

RAFIX 16
RAFIX 22 QR
RAFIX 22 FS

2



Signal Lamps

Signal lamps with integrated LED
Signal lamps with integrated lamp
Signal lamps with lamp socket
Panel mounting sockets

3



PCB Keyswitches

MICON 5 - Short-travel keyswitches
RACON - Short-travel keyswitches
RF - Short-travel keyswitches
KN 19 - Short-travel main switch
RK 90 - Keycaps
RG 85 III - Short-travel system
RS 76 - Full-travel keyswitches
Keylock and rotary switches for PCB

4



Accessories

Luminous elements
Other accessories

5







Appendix

Glossary
Reference number guide

6

Pushbuttons










						
	8 mm Series	LUMOTAST FK	LUMOTAST 25	LUMOTAST 75	Keylock switch	Other Pushbuttons
Panel cut-out	ø 8.1 mm	ø 16.2 mm	ø 16.2 mm	ø 16.2 mm	ø 16.2 mm	ø 9.1 – 20.3 mm
Contacts	1 NO	1 NO	1 NO	1 NC + 1 NO, 2 NC + 2 NO	1...4 NO	1 NC, 1 NO, 1 NC + 1 NO, 2 NC
Contact material	Au	Au	Au	Ag	Au	Ag
Voltage max./min.	35 V	35 V / 0,02 V	35 V / 0,02 V	250 V	35 V	250 V / 0,02 V
Current max./min.	250 mA	100 mA / 0,1 mA	100 mA / 0,1 mA	4 A	100 mA	2 A / 0.1 mA
Terminals	Solder	Flat-ribbon cable with connector, PCB socket	Flat-ribbon cable with connector, PCB socket	Solder	PCB	Solder, screw, quick connect
Protection	IP 40	IP 65	IP 65	IP 40 / 65	IP 65	IP 40
Lamp socket	Bi-Pin T1	Bi-Pin T1/T1¼	Bi-Pin T1/T1¼	T 4.5	–	BA 9s
Illumination	Filament lamp, LED	Filament lamp, LED	Filament lamp, LED	Filament lamp, LED	–	Filament lamp, LED
Collar shape	○ □	○ □ □	□	○ □ □	○ □	○
Variants	Illuminated push-button, signal lamp	Illuminated push-button, signal lamp	Illuminated push-button, keylock, E-stop, selector switch, signal lamp	Illuminated push-button, keylock switch, signal lamp	Keylock, authorization lock switch	Illuminated push-button

Control Components



Signal Lamps



						
RAFIX 16/ RAFIX 16 F	RAFIX 22 FS PCB	RAFIX 22 FS quick-connect	RAFIX 22 QR	Integral LED	Integral filament/ neon lamp	With lamp socket
ø 16.2 mm □ 23.1 mm ø 22.3 mm	ø 22.3 mm	ø 22.3 mm	ø 22.3 mm	ø 5 – 10 mm	ø 5 – 14 mm	ø 9.1 – 30.5 mm
1 NC, 1 NO, 1 NC + 1 NO, 2 NC, 2 NO	1 NC, 1 NO, 1 NC + 1 NO, 2 NC, 2 NO	1 NC, 1 NO, 1 NC + 1 NO, 2 NC, 2 NO	1 NC, 1 NO, max. 6 NC, 6 NO	–	–	–
Ag / Au	Ag / Au	Ag / Au	Ag / Au	–	–	–
250 V / 0,02 V	250V / 0,02 V	250V / 0,02 V	500 V / 0,02 V	28 V	6 - 230 V	35 / 250 V
6 A / 1 mA	4 A / 1 mA	4 A / 1 mA	10 A / 1 mA	0.25 - 1 W	0.3 - 1.2 W	1.2 - 5 W
PCB, quick-connect, screw	PCB	quick-connect	Screw, spring- type, quick-con- nect, RJ 12	Solder, quick-connect	Solder, quick- connect, cable	Solder, quick- connect, screw
IP 65	IP 65 / 69 K	IP 65 / 69 K	IP 65	IP 40	IP 40	IP 40 / 65
W 2x4.6d	LED	–	BA 9s	none	none	various
Filament lamp, LED	LED	LED clip	Filament lamp, neon lamp, LED	LED	Filament/ neon lamp	Filament/ neon lamp/LED
○ □	○ □	○ □	○ □	○ △	○ □ ↑	○
Pushbutton, keylock, E-stop, selector, toggle switch, potentiometer drive, buzzer, signal indicator	Pushbutton, keylock, E-stop, selector switch, signal indicator, potentiometer drive	Pushbutton, keylock, E-stop, selector switch, signal indicator, potentiometer drive	Pushbutton, keylock, mush- room, E-stop, selector switch, signal indicator, potentiometer drive, buzzer			

Short-Travel Keyswitches

MICON and RACON

RF 15/19



MICON 5



RACON 8



RACON 12



RF 15 / 15 H










RF 15 R



RF 15 N

Grid min.	6 x 8 mm	12 mm	15.24 mm	19.05 mm	15.24 mm	15.24 mm
Overall height, min.	3.85 mm, variable	5 mm, variable	5 mm, variable	9.7 / 12.5 mm	9.7 / 12.5 mm	9.7 / 12.5 mm
Contacts	1 NO	1 NO	1 NO	1 NO	1 NO	1 NO
Contact material	Au	Au	Au	Ag / Au	Ag / Au	Ag / Au
Rated voltage	0.02...35 V	0.02...35 V	0.02...35 V	0.02...50 V	0.02...50 V	0.02...50 V
Rated current	0.01...100 mA	0.01...100 mA	0.01...100 mA	0.01...250 mA	0.01...250 mA	0.01...250 mA
Operating travel	0.7 ... 1.1 mm	0.34 mm	0.61 mm	0.5 mm	0.5 mm	0.5 mm
Operating force	3.0 ... 8.0 N	3.3 N	3.6 ... 9.7 N	2 - 3 N	2 - 3 N	2 - 3 N
Terminals	PCB SMT &THT	PCB SMT &THT	PCB SMT &THT	PCB THT	PCB THT	PCB THT
Illumination	Separate LED	Separate LED	Separate LED	Full / Spot	Full / Spot	Spot
Operating life min.	250,000 / 1,000,000	1,000,000	1,000,000	1,000,000	1,000,000	1,000,000
Special features	Variable height by use of plungers, various operating forces	Variable height by use of plungers	Variable height by use of plungers, 90° vertical adapter	1-module indicator field, variable height by use of plungers		



	KN 19	RK 90	RG 85 III	Full-Travel Keyswitches RS 76		Keylock Switches
						
RF 19/19 H	KN 19	RK 90/II	RG 85 III	RS 76 M	RS 76 C	Keylock switch
23 mm	19.05 x 38,1 mm	12.5 / 19.05 mm	35 mm	19.05 mm	19.05 mm	19.05 mm
9.7 / 12.5 mm	9.7 mm		12.08 mm	15.5 mm	15.5 mm	40 mm
1 NO	1 NC + 1 NO/ 2 NC / 2 NO		1 NO / 1 NC + 1 NO	1 NO	1 NO	1 NO – 4 NO
Ag / Au	Ag		Ag	Au	contactless	Au
0.02...50 V	12...250 V		3...50 V	2...35 V	4.75...5.25 V	2...35 V
0.01...250 mA	6 A		0.1...250 mA	0.01...100 mA	–	0.01...100 mA
0.5 mm	0.5 mm		1 mm	4 mm	4 mm	1...4 x 90° rotating angle
2 - 3 N	9 ± 3 N		3.5 - 4.5 N	0.9...1.4 N	0.7...1 N	–
PCB THT	PCB THT		8-pin Micro Match connector	PCB THT	PCB THT	PCB THT
Full / Spot	Spot	Full	Edge and symbol	Full / Spot	Spot	–
1,000,000	50,000 - 200,000		1,000,000	10,000,000	100,000,000	10,000
Indicator fields 1/2-, 1- and 2-module	Main switch under overlay or keycaps	Plastic or aluminum surface, compatible to MICON, RACON, RF and KN 19	Vandal-proof	Fully illuminable keycaps (RS 76 MX)	Very soft stroke, extremely long operating life	Degree of protection IP 54 priority keylock switch




The Head Office as well as the development, logistics, production and sales departments are based in Berg near Ravensburg.

The merging of the European Union has increased the appeal of this geographical location in the south-west of Germany for an internationally active company like RAFI. The region near Lake Constance has always been internationally-minded and is now at the heart of the EU, the most important interior market in the world. Domestic and international business is facilitated by good links to the most important road and rail networks and the Friedrichshafen regional airport.

RAFI is represented in all important global industrial locations, either by its own subsidiaries or by contractual agencies. Assembly plants in China and Hungary and the membrane keyboard manufacturer "PIM" in France have laid the foundations for the internationalisation of our production.

The RAFI Group

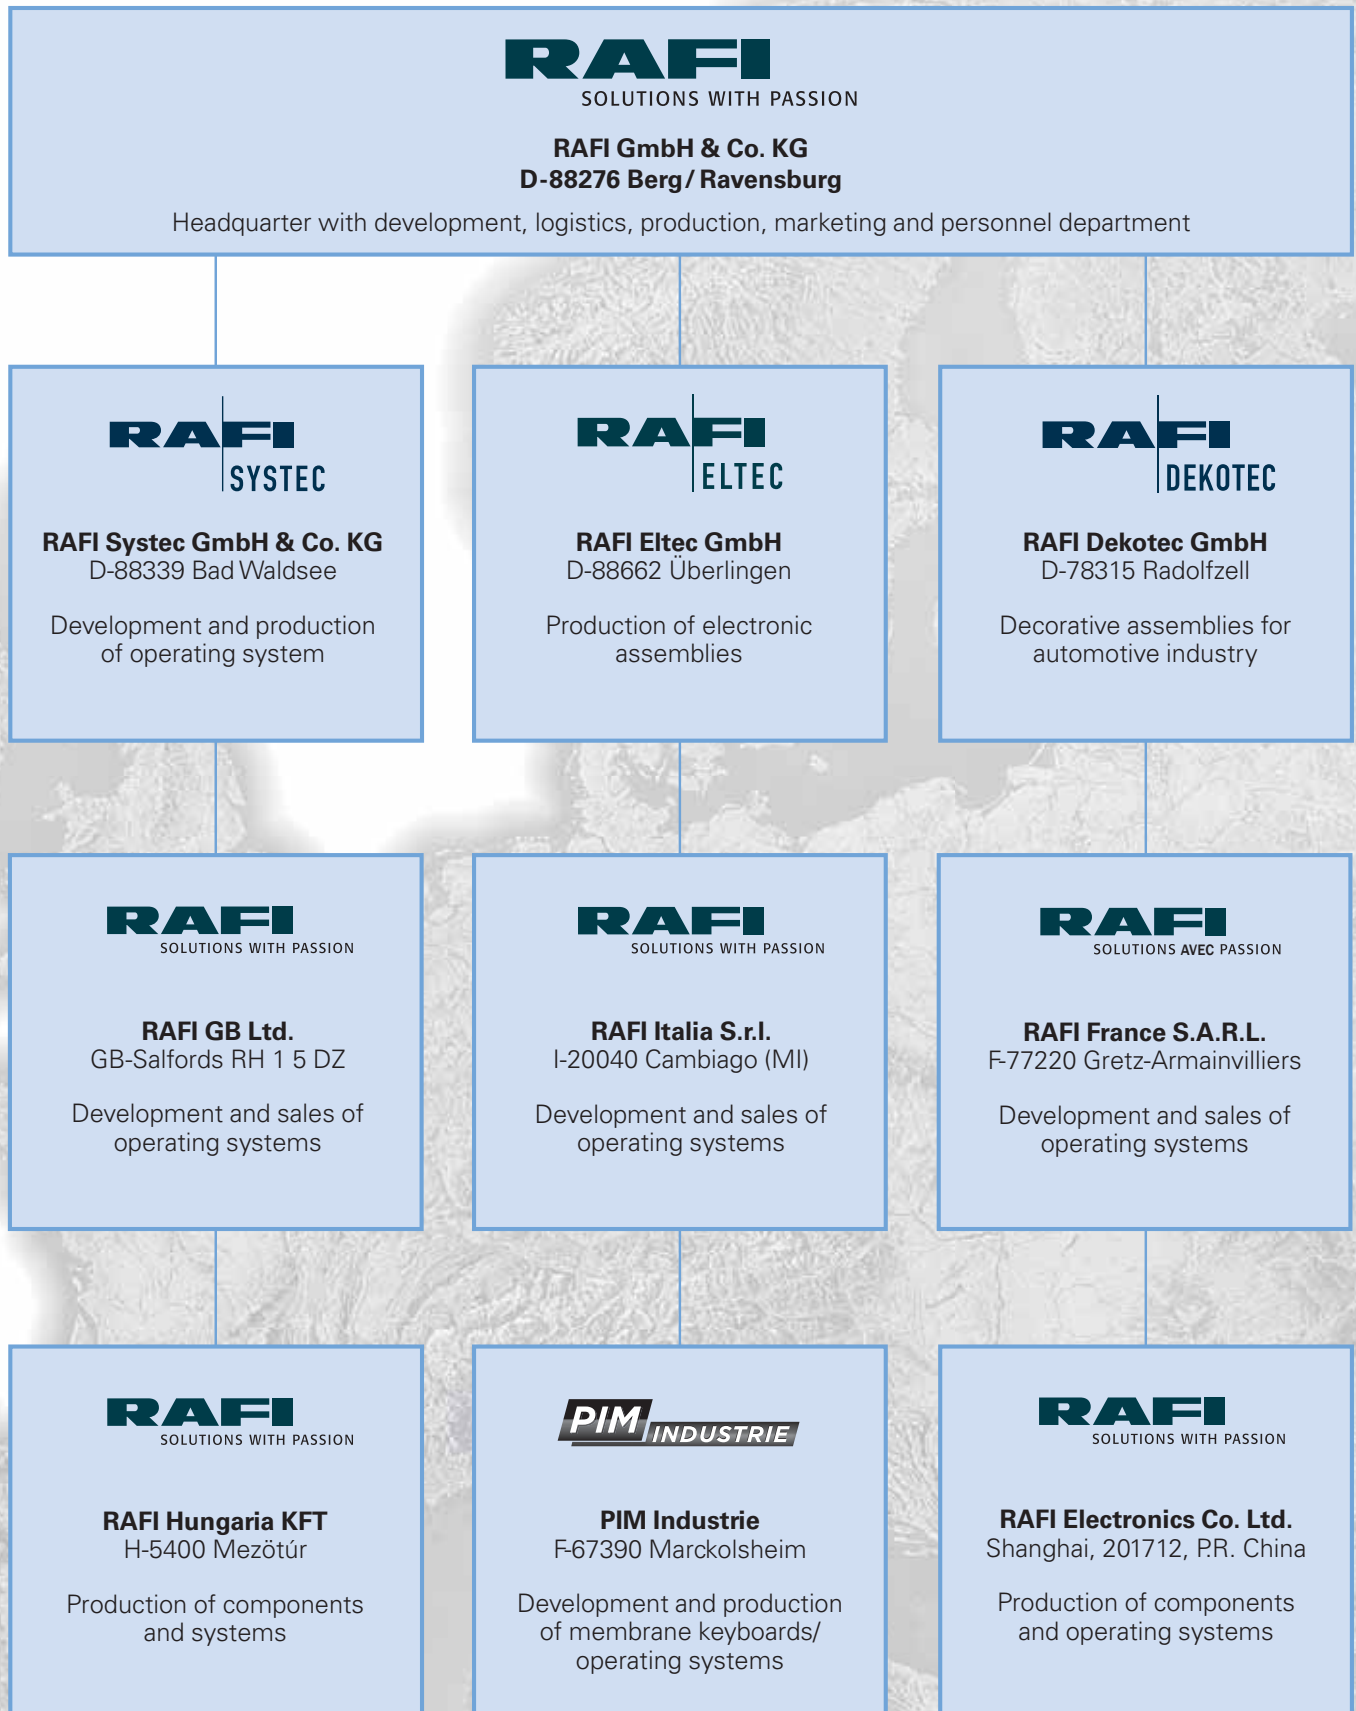

Components

RAFI's electromechanical components offer highest precision for input, display and switching tasks. Top priority is given to reliability and a long service life.



Customer designed components

For specific requirements we are able to modify or even reconstruct our products according to your wishes.



Standard keyboards

Full-travel and membrane keyboards for PC applications. From the numerical key block to the integrated tracker ball.



Systems

If you prefer complete input units rather than individual components, we develop and produce customer designed operating panels for you with electronic encoding and the required interfaces (e.g. field bus interface).



Electronic modules

It is near at hand for a manufacturer of data entry systems to be active in the field of electronics as well. Today, RAFI can offer you comprehensive know-how in the development and manufacture of complete electronic assemblies. The spectrum of our services comprises the circuit concept, selection and procurement of suitable component parts, hardware and software development, design suggestions, PCB layout, assembly of the complete module, functional tests, delivery and maintenance service.



Telecommunications

International procurement, production streamlining, production and logistics for electronic assemblies in the field of telecommunications.

Automotive

Customer-specific operating panels in cars and commercial vehicles. Ergonomic handling concepts, up-to-date design and absolute reliability.



Development: State-of-the-art technology for creative solutions



We utilize state-of-the-art computer-based systems for the development and production of the switches, pushbuttons, keyboards and control units, millions of which are output each year from our production plants. CAD facilities support our engineers and precision parts are manufactured on CNC machines; concurrent engineering guarantees the best possible results since production planning and quality assurance considerations are incorporated as early as in the development phase of a product.

Logistics: Just in time



Our logistics department is not limited to merely taking care of just-in-time delivery of your products. An equally important task is the procurement of all the necessary raw materials and component parts in the international markets.

Precise production and delivery relies on an organization working at the same level of precision. For this reason, our computer-assisted ordering system is based on SAP.

Our customers' orders are processed with EDIFACT, Electronic Data Interchange For Administration, Commerce and Transport. The underlying idea is: Implement a generally accepted standard for data exchange between customers and suppliers. Our customers' order data can be input directly into our data processing system.

Production

Our production methods are guided by economical as well as ecological considerations. It is our objective to reach a defined quality standard with maximum economy, a careful use of our natural resources and a high degree of environmental compatibility.



Assembly and testing



SMT production lines



THT PCB assembly and solder bath



CNC sheet metal machining center



Screen printing of overlays



CNC machining centers




































High-performance injection-moulding machines



Assembly plant in Hungary (Mezőtúr)

Summary of new products	Photo	Page
RAFIX 16 F - Pushbutton, flush lens, round metallized collar		2 - 56
RAFIX 16 F - Selector switch, round metallized collar		2 - 62
RAFIX 16 F - Keylock switch MICROMECC, round metallized collar		2 - 66
RAFIX 16 F - Signal indicator, flush lens, round metallized collar		2 - 72
RAFIX 16 - Standard contact block, gold contacts, with screw terminals		2 - 77
RAFIX 16 - Universal contact block, gold contacts, with screw terminals		2 - 79
RAFIX 16 - Standard contact block, silver contacts, with screw terminals		2 - 83
RAFIX 16 - universal contact block, silver contacts, with screw terminals		2 - 85
RAFIX 22 QR - Pushbutton with protective cap, flush lens, round collar		2 - 111
RAFIX 22 QR - Pushbutton with protective cap, flush lens, square collar		2 - 115
RAFIX 22 QR - Signal indicator, high, round collar		2 - 143
RAFIX 22 QR - Signal indicator, high, square collar		2 - 144
RAFIX 22 FS - Pushbutton, with protective cap, flush lens, round collar		2 - 186
RAFIX 22 FS - Pushbutton, with protective cap, flush lens, square collar		2 - 190
RAFIX 22 FS - Emergency stop pushbutton „Plus 1“		2 - 206
RAFIX 22 FS - Emergency stop pushbutton „Plus 1“; reset by rotation		2 - 207
RAFIX 22 FS - Emergency stop pushbutton „Plus 1“; reset by pulling (IP69K)		2 - 207
RAFIX 22 FS - Potentiometer drive		2 - 208

Summary of new products	Photo	Page
RAFIX 22 FS - Potentiometer drive, round collar		2 - 209
RAFIX 22 FS - Potentiometer drive, square collar		2 - 209
RAFIX 22 FS - Signal indicator, round collar, high version		2 - 211
RAFIX 22 FS - Signal indicator, square collar, high version		2 - 212
RAFIX 22 FS - Contact block with quick-connect terminal and gold contacts		2 - 214
RAFIX 22 FS - Contact block with quick-connect terminal and gold contacts		2 - 215
RAFIX 22 FS - Contact block with quick-connect terminals, silver contacts		2 - 216
RAFIX 22 FS - Contact block with quick-connect terminals, silver contacts		2 - 217
RAFIX 22 FS - E-Box Housing		2 - 226
RAFIX 22 FS - E-Box, yellow, for Emergency-stop pushbuttons		2 - 227
RAFIX 22 FS - E-Box, grey, for pushbuttons		2 - 227
RAFIX 22 FS - E-Box contact module with gold contacts		2 - 228
RAFIX 22 FS - E-Box contact modules for Emergency-stop applications		2 - 229
RAFIX 22 FS - E-Box contact modules for standard applications		2 - 230
RAFIX 22 FS - E-Box contact module with silver contacts		2 - 232
RAFIX 22 FS - E-Box contact modules for Emergency-stop applications		2 - 233
RAFIX 22 FS - E-Box contact modules for standard applications		2 - 233
LED base for signal indicators		2 - 235

Summary of new products	Photo	Page
RAFIX 16 F - Signal indicator, flush lens, round metallized collar		3 - 82
RAFIX 22 QR - Signal indicator, high, round collar		3 - 90
RAFIX 22 QR - Signal indicator, high, square collar		3 - 91
RAFIX 22 FS - Signal indicator, round collar, high version		3 - 93
RAFIX 22 FS - Signal indicator, square collar, high version		3 - 94
MICON 5 - Short-travel keyswitches		4 - 4
MICON 5 - Short-travel keyswitch, SMT Standard		4 - 6
MICON 5 - Short-travel keyswitch, SMT low		4 - 7
MICON 5 - Short-travel keyswitch, THT Standard		4 - 7
MICON 5 - Plungers round, not illuminable		4 - 8
MICON 5 - Plunger opaque, round, not illuminable		4 - 9
MICON 5 - Plungers square, illuminable		4 - 12
MICON 5 - Plunger square, illuminable, 11 x 11 mm		4 - 13
MICON 5 - Plunger square, illuminable, 14.5 x 14.5 mm		4 - 14
MICON 5 - Plunger square, illuminable, 18 x 18 mm		4 - 15
RK 90 II - Key cap system for RACON 12 with individual sealing		4 - 36



www.klinkmann.com

Helsinki
tel. +358 9 540 4940
automation@klinkmann.fi

St. Petersburg
tel. +7 812 327 3752
klinkmann@klinkmann.spb.ru

Moscow
tel. +7 495 641 1616
moscow@klinkmann.spb.ru

Yekaterinburg
tel. +7 343 376 5393
yekaterinburg@klinkmann.spb.ru

Mineralnye Vody
tel. +7 879 226 1934
pyatigorsk@klinkmann.spb.ru

Samara
tel. +7 846 342 6655
samara@klinkmann.spb.ru

Kiev
tel. +38 044 495 3340
klinkmann@klinkmann.kiev.ua

Riga
tel. +371 6738 1617
klinkmann@klinkmann.lv

Vilnius
tel. +370 5 215 1646
post@klinkmann.lt

Tallinn
tel. +372 668 4500
klinkmann.est@klinkmann.ee

Minsk
tel. +375 17 200 0876
minsk@klinkmann.com