

Heat shrinkable sleeving PLIOFINE SAM in cross-linked Polyolefin

Shrink ratio : 2/1




PLIOFINE SAM



PLIOFINE SAM

Material:	Cross-linked Polyolefin
Operating temperature:	-55 to +125°C
Min. shrink temperature:	120°C
Longitudinal change:	±10% ASTM D2671
Dielectric strength:	20kV/mm IEC 243
Flammability:	self-extinguishing ASTM D2671
Fluid resistance :	good to excellent ISO 1817, ISO 37 MIL-1-23053
Application :	general purpose

On special request, we will deliver the sleeving certified UL 224. Please contact us.

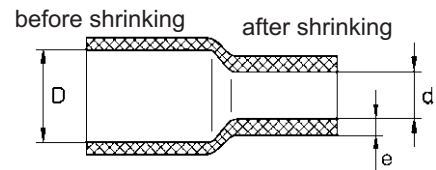

Heat shrinkable tubing PLIOFINE is composed of cross-linked Polyolefin (derived from polyethylene), unlike heat shrinkable sleeving PLIO "R" it cannot be melted or welded and has excellent chemical properties. It is cost effective. Dielectric properties, ageing and weather resistance are excellent, and the sleeving needs no special storing conditions as it remains inert up to +50°C.

• Cardboard reel

type	art. nr. black 010	m	D mm	d mm	e mm
SAM 1,2	0603 0005 010	150	1,20	0,60	0,45
SAM 1,6	0603 0010 010	150	1,60	0,80	0,45
SAM 2,4	0603 0020 010	150	2,40	1,20	0,51
SAM 3,2	0603 0030 010	150	3,20	1,60	0,51
SAM 4,8	0603 0050 010	75	4,80	2,40	0,50
SAM 6,4	0603 0060 010	75	6,40	3,20	0,64
SAM 9,5	0603 0080 010	75	9,50	4,80	0,64
SAM 12,7	0603 0090 010	50	12,70	6,40	0,64
SAM 16,0	0603 0100 010	50	16,00	8,00	0,64
SAM 19,0	0603 0110 010	50	19,00	9,50	0,76
SAM 25,4	0603 0120 010	50	25,40	12,70	0,89
SAM 32,0	0603 0130 010	50	32,00	16,00	0,89
SAM 38,1	0603 0140 010	30	38,10	19,00	1,02
SAM 50,8	0603 0150 010	30	50,80	25,40	1,14
SAM 76,2	0603 0160 010	25	76,20	38,10	1,27
SAM 101	0603 0170 010	25	101,60	50,80	1,40



Heat shrinkable sleeving PLIOFINE SAM in cross-linked Polyolefin

Shrink ratio : 2/1




PLIOFINE SAM


-55 to +125°C



• Length of 1,22 m

The heat shrinkable sleeving is cut during the manufacturing. This is why it is straight and easy to use. It is not flattened and has no folds which you meet on sleeving on reels.

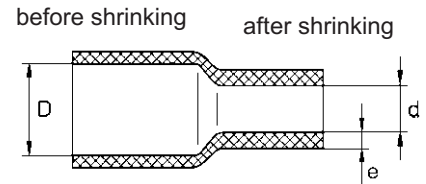


type	art. nr. black 010	 pce	D mm	d mm	e mm
SAM 1,2	0603 0006 010	25	1,20	0,60	0,45
SAM 1,6	0603 0011 010	25	1,60	0,80	0,45
SAM 2,4	0603 0021 010	25	2,40	1,20	0,51
SAM 3,2	0603 0031 010	25	3,20	1,60	0,51
SAM 4,8	0603 0051 010	25	4,80	2,40	0,50
SAM 6,4	0603 0061 010	25	6,40	3,20	0,64
SAM 9,5	0603 0081 010	25	9,50	4,80	0,64
SAM 12,7	0603 0091 010	25	12,70	6,40	0,64
SAM 16,0	0603 0101 010	25	16,00	8,00	0,64
SAM 19,0	0603 0111 010	25	19,00	9,50	0,76
SAM 25,4	0603 0121 010	10	25,40	12,70	0,89
SAM 32,0	0603 0131 010	10	32,00	16,00	0,89
SAM 38,1	0603 0141 010	10	38,10	19,00	1,02
SAM 50,8	0603 0151 010	10	50,80	25,40	1,14
SAM 76,2	0603 0161 010	10	76,20	38,10	1,27
SAM 101	0603 0171 010	10	101,60	50,80	1,40



Heat shrinkable sleeveings in lengths are available per piece or per complete pack.

• Dispenser box

type	art. nr. black 010	 m	D mm	d mm	e mm
SAM 1,6	0603 0210 010	17	1,60	0,80	0,45
SAM 2,4	0603 0220 010	15	2,40	1,20	0,51
SAM 3,2	0603 0230 010	15	3,20	1,60	0,51
SAM 4,8	0603 0240 010	12	4,80	2,40	0,5
SAM 6,4	0603 0250 010	12	6,40	3,20	0,64
SAM 9,5	0603 0260 010	8	9,50	4,80	0,64
SAM 12,7	0603 0270 010	8	12,70	6,40	0,64
SAM 16,0	0603 0275 010	6	16,00	8,00	0,64
SAM 19,0	0603 0280 010	5	19,00	9,50	0,76
SAM 25,4	0603 0290 010	5	25,40	12,70	0,89



 A4/90-01 - Bench support for PLIOFINE

