




# Electronic Products and Relays Selection Table Timer CT-Range








# Accessories




MT-x50B




30 mm adapters




Marker label  
29.6 x 44.5 mm




Marker label  
with scale 0-10  
48.5 x 44.5 mm




Marker label  
with scale 0-30  
48.5 x 44.5 mm

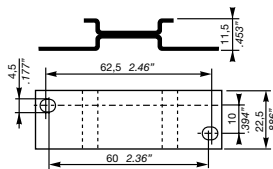

ADP.01



COV.01




MAR.01

## Remote potentiometer

50 kΩ ±20 % - 0,2Ω, degree of protection IP66

Type	Material	Diameter in mm	Order code	Pack.- unit	Weight 1 piece g / oz
MT-150B	Plastic, black	22.5	1SFA 611 410 R1506	1	0.040
MT-250B	Plastic, chrome	22.5	1SFA 611 410 R2506	1	0.040
MT-350B	Metal, chrome	22.5	1SFA 611 410 R3506	1	0.048

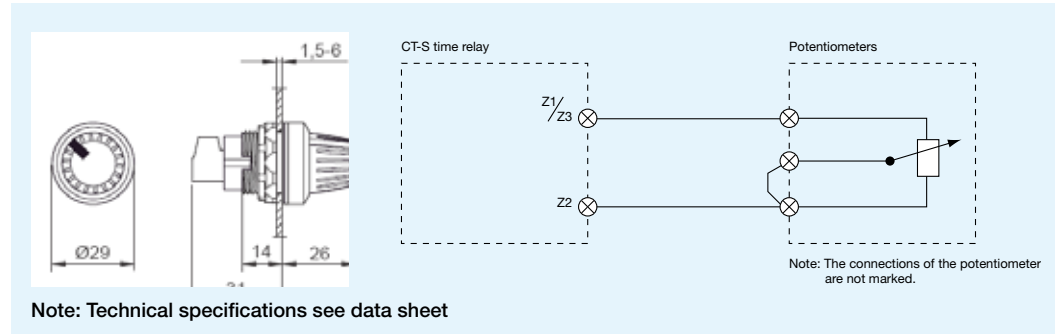

## 30 mm adapter for attaching the potentiometer 22.5 mm in 30.5 mm mounting hole

Type	Material	Order code	Pack.- unit	Weight 1 piece g / oz
KA1-8029	Plastic, black	1SFA 616 920 R8029	1	
KA1-8030	Metal, chrome	1SFA 616 920 R8030	1	

## Marker label

Type	Caption	Order code	Pack.- unit	Weight 1 piece g / oz
SK 615 562-87	Symbol (see illustration)	GJD6 155 620 R0087	1	0.002
SK 615 562-88	Scale 0 - 10	GJD6 155 620 R0088	1	0.002
MA16-1060	Scale 0 - 30	1SFA 611 940 R1060	1	0.002

Type	for devices	Width in mm	Order code	Pack.- unit	Weight 1 piece g / oz
------	-------------	----------------	------------	----------------	--------------------------

## Adapter for screw mounting

ADP.01	CT-S	22,5	1SVR 430 029 R0100	1	18.4/0.65
--------	------	------	--------------------	---	-----------

## Sealable transparent cover

COV.01	CT-S	22,5	1SVR 430 005 R0100	1	5.2/0.18
--------	------	------	--------------------	---	----------

## Marker label

Type	for devices	for devices	Order code	Pack.- unit	Weight 1 piece g / oz
MAR.01	CT-S	without DIP switch	1SVR 366 017 R0100	10	0.19/0.007
MAR.02	CT-S	with DIP switch	1SVR 430 043 R0000	10	0.13/0.005

ABB\_Electronic\_Products\_and\_Relays\_CT\_Selection\_Table\_en\_1111.pdf



www.klinkmann.com

### Helsinki

tel. +358 9 540 4940  
automation@klinkmann.fi

### Yekaterinburg

tel. +7 343 376 5393  
yekaterinburg@klinkmann.spb.ru

### Vilnius

tel. +370 5 215 1646  
post@klinkmann.lt

### St. Petersburg

tel. +7 812 327 3752  
klinkmann@klinkmann.spb.ru

### Samara

tel. +7 846 273 95 85  
samara@klinkmann.spb.ru

### Tallinn

tel. +372 668 4500  
klinkmann.est@klinkmann.ee

### Moscow

tel. +7 495 641 1616  
moscow@klinkmann.spb.ru

### Kiev

tel. +38 044 495 33 40  
klinkmann@klinkmann.kiev.ua

### Riga

tel. +371 6738 1617  
klinkmann@klinkmann.lv

### Minsk

tel. +375 17 200 0876  
minsk@klinkmann.com